



2904

hand-drawn

for light and medium-weight curtains

One rail, many possibilities

2904



hand-drawn

for light and medium-weight curtains

versatile & discreet

The Qurails 2904 multichannel profile is the ideal track for combining sheers and main drapes. Mount just one track to have two rail channels which run parallel to each other. Because of the low profile height of 8 mm, the track is barely visible. The track can be quickly and easily mounted on a ceiling or in a window opening.

- The ideal track for combining sheers and lightweight or medium-heavy curtains.
- Concealed ceiling mounting.
- Silent and smooth running.
- Often used in hotels



Standard colours




High quality, wear-resistant coating, highly colourfast, UV-resistant.
Other RAL colours & special coatings on request.

Features


| | |
|-----------------|-----------|
| Material: | aluminium |
| Colour: | white |
| Dimensions: | 8 x 71 mm |
| Weight profile: | 488 gr/m |
| Mounting: | ceiling |

Profile/glider specifications

Aluminium profile:



Glider:

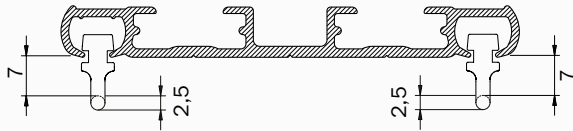

Colours with RAL code and lengths (m):

| | RAL | 4 | 5 | 6 | 7 |
|-------|------|---|---|---|---|
| white | 9010 | • | | • | |

Mounting surface:


- wood
- masonry/concrete

Bracket type:

- screw mounting


Bending:

The 2904 cannot be bent; a separate return bend can, however, be mounted on the front channel of the 2900. The minimum bending radius of the 2900 is R20.

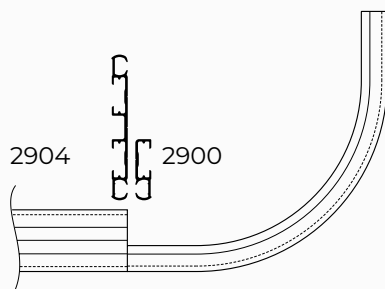

combining wide profile 2904 with 90 degree return 2900-R-W, connected via rail connector 2952.

Mounting

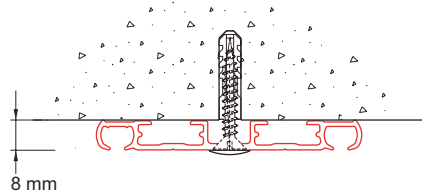


Ceiling mounting of a pre-punched 2904 with 2914-WD screws with white caps.

Mounting guideline

The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity.

General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

| drill hole distances: | always 10cm | 90cm max. ca. 80cm avg. | 90cm max. ca. 80cm avg. | 90cm max. ca. 80cm avg. | 90cm max. ca. 80cm avg. | always 10cm |
|-----------------------|-------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------|
|-----------------------|-------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------|

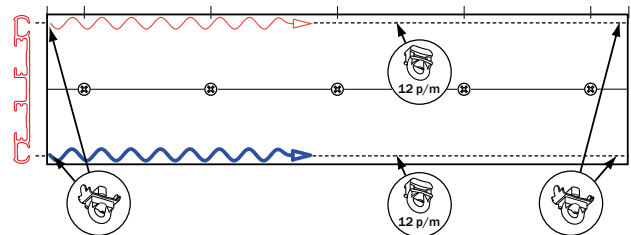

Specification guide

Material

- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.




Standard parts

Curtain transport



2001
twist end stop
white / grey / black




2010
glider
white / grey /
black

Mounting




2914
screw with
white cover

Accessories



2953-04
end cap white




2952
connecting bridge
natural

Optional parts


Curtain transport




2001-50-M-N
2001-50-M-N
end stop with eye
metal natural



2004
brake glider
white / black



4074-1000
carrier with overlap,
a.o. for draw rod
white / natural metallic
/ black



4075-1000
carrier without overlap,
a.o. for draw rod white
/ natural metallic /
black



2010-50
glider 2010 with
hook 2023 white



2010-60
glider 2010-W
with SS hook
white



2012-50
click-in glider
with hook
white



2012
click-in glider
white



2020
double hook
white



2021-FL
G-Hook
white



2022
curtain hook
white



2023
curtain hook
white



2024-55
adjustable sew in
hook white
55mm




2024-95
adjustable sew in
hook white
95mm

Accessories



KVT-T1
draw rod 100, 125, 150,
200 or 300 cm white /
natural metallic / black
/ transparent



2900-R-W /
2901-R-W
90 degree return
radius 20 cm, incl.
connector 2952

Technical specifications are subject to
change without prior notice.

Qurails[®]
Open a new experience