







4400

hand-drawn

for light, medium- and heavy-weight curtains

Elegant track with attractive curves

4400



hand-drawn

for light, medium- and heavy-weight curtains

elegant & rounded

The Qurails 4400 track is an elegant rounded profile that can be mounted invisibly on a ceiling. The flange on the visible side minimises the gap between the ceiling and the track. The curtains glide smoothly virtually without sound. A very popular track in hotels.

- The ideal track for sheers, medium-heavy or heavy curtains.
- Easy to bend and exceptional quality.
- Can be forward or reverse bent in different radii.
- Compatible with the Qurails Flow System for regularly pleated curtains.
- Silent and smooth running, also round bends.
- Compatible with LRS gliders.



Standard colours







Features


Material: aluminium


Colour: white, natural anodised, black

Dimensions: 18 x 21 mm
Weight profile: 229 gr/m
Mounting: wall or ceiling

Profile/gliderspecifications

Aluminium profile: Glider:





Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010			•	
natural				•	
black	9005			•	

Mounting surface:

- wood
- masonry/concrete

Bracket type:

- ceiling bracket
- spacer bracket

Bending:

bending radius	bending tool		
R 15 cm R>80 cm	1015 1018		
R 15 cm R > 8	R > 80 cm		

Flow

The Qurails Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cord-pulled and electrically operated systems.

The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data sheet.


Specification guide Material


- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.

Mounting

nting 4400 with 4400 with head with 6010


Ceiling mounting 4400 with fixing clamp 4450, including washer (a minimum gap of 30 mm has to be left for tightening the fixing clamp)








Wall mounting 4400 with spacer brackets 4415

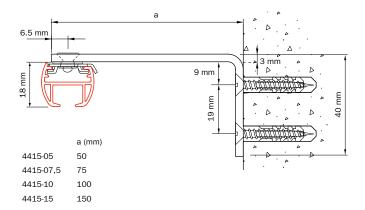

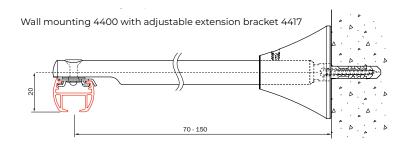

Mounting guideline



The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.

Standard parts

Curtain transport



4001 end stop white / grey / black



4010 glider white / grey / black

Mounting



4450 bracket for incl. ring

Accessories



4453 endcap white / grey / black



4452 connecting bridge

Optional parts

Curtain transport



2004 brake glider white / grey / black



4001-M-N end stop metal with eye natural



4002 end stop metal



4003

spring stop plastic requires punch hole



4007

rotating glider white/ grey / silver / black



4007-LRS

rotating glider LRS / grey / rotating glider LRS red



4010-50

glider white with hook 2023



4012

click-in glider white



4020

heavy duty glider white / grey / black



4074-1000

carrier with overlap, a.o. for draw rod white / natural metallic / black



4075-1000

carrier without overlap, a.o. for draw rod white / natural metallic / black



6010

projection glider white/grey/black



2020

double hook white



2021

G-Hook white



2022

curtain hook white



2023

curtain hook white



2024-55

adjustable sew in hook white 55mm



2024-95

adjustable sew in hook white

Mounting



4415

extension bracket 5, 7.5, 10, 15 cm white / natural metallic / black



4417

adj. extension bracket 7-15 cm, white / natural metallic / black

Accessories



4048-08MM

corner connection



KVT-T1

draw rod 100, 125, 150, 200 or 300 cm white / natural metallic

/black/transparent

Technical specifications are subject to change without prior petion

without prior notice.

